

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D01F 2/00, D21H 13/08, D04H 1/42		A1	(11) International Publication Number: WO 95/35399
			(43) International Publication Date: 28 December 1995 (28.12.95)
(21) International Application Number: PCT/GB95/01439		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 19 June 1995 (19.06.95)			
(30) Priority Data: 9412500.2 22 June 1994 (22.06.94) GB			
(71) Applicant (for all designated States except US): COURTAULDS FIBRES (HOLDINGS) LIMITED [GB/GB]; 50 George Street, London W1A 2BB (GB).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): GANNON, James, Martin [GB/GB]; 33 Westbury Road, Chapelfields, Coventry CV5 8JE (GB). GRAVESON, Ian [GB/GB]; 75 Bettina Close, Nuneaton CV10 9EX (GB). JOHNSON, Pamela, Ann [GB/GB]; 63 Kirby Road, Earlsdon, Coventry CV5 6HL (GB). WOODINGS, Calvin, Roger [GB/GB]; 12 Copsewood Avenue, Nuneaton, Warwickshire CV11 4TQ (GB).			
(74) Agent: HALE, Stephen, Geoffrey; J.Y. & G.W. Johnson, Furnival House, 14-18 High Holborn, London WC1V 6DE (GB).			
Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>			
(54) Title: LYOCELL FIBRE AND A PROCESS FOR ITS MANUFACTURE			
(57) Abstract <p>The fibrillation tendency of solvent-spun cellulose fibre can be increased by subjecting the fibre to a treatment which reduces its degree of polymerisation by about 200 units or more. Suitable methods of treatment include severe bleaching, for example application of an aqueous liquor containing 0.1 to 10 percent by weight sodium hypochlorite (as available chlorine) to the fibre followed by steaming. Fibre may be treated in never-dried or previously-dried form. Fibre treated by the process of the invention is useful for example in the manufacture of paper and hydroentangled fabrics. Fibre of increased tendency to fibrillation can be beaten to a Canadian Standard Freeness 400 in the Disintegration Test by 30,000-150,000 disintegrator revolutions and to a Canadian Standard Freeness 200 in the same Test by 50,000-200,000 disintegrator revolutions.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

LYOCELL FIBRE AND A PROCESS FOR ITS MANUFACTUREField of the invention

This invention relates to a process for manufacturing
5 lyocell fibre with an increased tendency to fibrillation and
to lyocell fibre having an increased tendency to
fibrillation.

It is known that cellulose fibre can be made by
extrusion of a solution of cellulose in a suitable solvent
10 into a coagulating bath. This process is referred to as
"solvent-spinning", and the cellulose fibre produced thereby
is referred to as "solvent-spun" cellulose fibre or as
lyocell fibre. Lyocell fibre is to be distinguished from
cellulose fibre made by other known processes, which rely on
15 the formation of a soluble chemical derivative of cellulose
and its subsequent decomposition to regenerate the
cellulose, for example the viscose process. Lyocell fibres
are known for their impressive textile physical properties,
such as tenacity, in comparison with fibres such as viscose
20 rayon fibres. One example of a solvent-spinning process is
described in US-A-4,246,221, the contents of which are
incorporated herein by way of reference. Cellulose is
dissolved in a solvent such as an aqueous tertiary amine
N-oxide, for example N-methylmorpholine N-oxide. The
25 resulting solution is then extruded through a suitable die
into an aqueous bath to produce an assembly of filaments
which is washed with water to remove the solvent and is
subsequently dried.

Fibres may exhibit a tendency to fibrillate,
30 particularly when subjected to mechanical stress in the wet
state. Fibrillation occurs when fibre structure breaks down
in the longitudinal direction so that fine fibrils become
partially detached from the fibre, giving a hairy appearance
to the fibre and to fabric containing it, for example woven
35 or knitted fabric. Such fibrillation is believed to be
caused by mechanical abrasion of the fibres during treatment

- 2 -

in a wet and swollen state. Higher temperatures and longer times of treatment generally tend to produce greater degrees of fibrillation. Lyocell fibre appears to be particularly sensitive to such abrasion and is consequently often found
5 to be more susceptible to fibrillation than other types of cellulose fibre. Intensive efforts have been made to reduce the fibrillation of lyocell fibres.

The presence of fibrillated fibres is advantageous in certain end-uses. For example, filter materials containing
10 fibrillated fibres generally have high efficiency. Fibrillation is induced in paper-making processes by beating the fibres, which is generally known to increase the strength and transparency of the paper. Fibrillation may also be utilised in the manufacture of non-woven fabrics,
15 for example hydroentangled fabrics, to provide improved cohesion, cover and strength. Although the fibrillation tendency of lyocell fibres is higher than that of other cellulose fibres, it is not always as great as may be desired for some end-uses. It is an object of the present
20 invention to provide lyocell fibre with an increased fibrillation tendency.

Disclosure of the invention

The present invention provides a process for the manufacture of lyocell fibre with an increased tendency to
25 fibrillation, including the steps of:

- (1) dissolving cellulose in a solvent to form a solution,
- (2) extruding the solution through a die to form a plurality of filaments, and
- 30 (3) washing the filaments to remove the solvent, thereby forming lyocell fibre; and the characterising step of
- (4) subjecting the lyocell fibre to conditions
35 effective to reduce the Degree of Polymerisation of the cellulose by at least about 200 units.

- 3 -

The solvent preferably comprises a tertiary amine N-oxide, more preferably N-methylmorpholine N-oxide (NMMO), and it generally contains a small proportion of water. When a water-miscible solvent such as NMMO is used, the filaments 5 are generally washed in step (3) with an aqueous liquor to remove the solvent from the filaments.

Lyocell fibre at the end of step (3) is in never-dried form and generally requires to be dried. In one embodiment of the invention, the degradation step (4) is performed on 10 never-dried fibre which is subsequently dried. In another embodiment of the invention, the fibre is dried between steps (3) and (4). Use of the degradation step (4) according to the invention on previously-dried fibre may be convenient if batchwise processing or longer treatment times 15 are desired. Previously-dried fibre may be treated in the form of fibre, yarn or fabric, including woven, knitted and non-woven fabric.

Lyocell fibre is produced in the form of tow which is commonly converted into short length staple fibre for 20 further processing, either in the never-dried or dried state. A lyocell tow may be converted into staple fibre either before or after the degradation step (4) and either before or after drying.

The lyocell fibre manufactured by the process of the 25 invention may be unpigmented (bright or ecru) or pigmented, for example incorporating a matt pigment such as titanium dioxide.

The degree of polymerisation (D.P.) of cellulose is conveniently assessed by viscosimetry of a dilute solution 30 of cellulose in a solvent which is an aqueous solution of a metal/amine complex, for example cuprammonium hydroxide solution. A suitable method, based on TAPPI Standard T206, is described hereinafter as Test Method 1. Cellulose D.P. is a measure of the number of anhydroglucose units per

- 4 -

molecule. It will be understood that D.P. measured in this manner is a viscosity-average D.P.

The desired reduction in cellulose D.P. in the degradation step (4) may be achieved in a number of ways.

5 In one embodiment of the invention, the D.P. is reduced by a bleaching treatment, preferably using a bleaching liquor. The bleaching liquor may be applied to the fibre by passage through a bath, by padding, or by spraying, for example, particularly by spraying the liquor onto a tow of fibre

10 emerging from a nip between rollers.

Bleaching of never-dried fibre may be carried out using an aqueous solution comprising a hypochlorite such as sodium hypochlorite, for example a solution containing 0.1 to 10, preferably 0.25 to 4, more preferably 0.5 to 2, per cent by

15 weight NaOCl (expressed as available chlorine). The bleaching liquor may optionally contain in addition an alkali such as sodium hydroxide, for example up to about 0.5 or up to about 1 per cent by weight sodium hydroxide. Alternatively, the pH of the bleaching liquor may be

20 controlled in the range from 5.5 to 8, preferably around 6 to 7. Degradation has been found to be relatively rapid in these pH ranges. A hypochlorite bleaching liquor may if desired be applied to the fibre at elevated temperature, for example about 50°C. Less concentrated bleach liquors may be

25 used in the batchwise treatment of previously-dried lyocell fibre. For example, the bleaching liquor may contain 0.1 to 1 per cent by weight available chlorine, and bleaching conducted at slightly elevated temperature, for example 30 to 60°C, for 1 to 3 hours.

30 Bleaching may alternatively be carried out using an aqueous solution comprising a peroxide, particularly hydrogen peroxide, for example a solution containing 0.5 to 20, preferably 1 to 6, more preferably 1 to 4, per cent by weight hydrogen peroxide. A peroxide bleaching liquor

35 preferably additionally contains an alkali such as sodium

- 5 -

hydroxide, for example about 0.05 to about 1.0 per cent by weight sodium hydroxide. The pH of an alkaline peroxide bleaching liquor is preferably in the range from 9 to 13, more preferably 10 to 12. Preferably, no peroxide stabiliser is used. Acidic peroxide solutions (pH 1 or less) may alternatively be used. A peroxide bleaching liquor is preferably applied to the fibre at ambient temperature or below to minimise unwanted decomposition of the peroxide. Peroxide bleaching liquors have generally been found to be less effective in reducing cellulose D.P. than hypochlorite bleaching liquors, and accordingly the latter may be preferred if large reductions in D.P. are desired. The effectiveness of a peroxide treatment may be increased by pretreating the lyocell fibre with a solution of a transition metal ion which catalyses the decomposition of peroxide ions, for example copper or iron cations. It will be appreciated that such pretreatment is preferably used in conjunction with a peroxide liquor application technique which does not involve a circulating bath.

20 The effectiveness of a bleaching treatment such as hypochlorite or peroxide bleaching may alternatively be enhanced by exposure to ultraviolet radiation.

After the fibre has been wetted with a bleaching liquor, it is preferably heated to induce and accelerate the degradation reaction during which the D.P. of the cellulose is reduced. For example, a tow of lyocell fibre wetted with bleaching liquor may be passed through a steam tunnel or heated J-box. Wet or superheated steam may be used. The temperature in a steam tunnel may be in the approximate range from 80 to 130°C and the residence time may be in the range from 10 to 200 or 20 to 60 seconds, although it will be understood that temperature and time are to be chosen having regard to the degree of reduction in cellulose D.P. desired. Other types of equipment such as a J-box or a bed steamer may be used if longer steaming times, for example in the range from 5 to 30 minutes, are desired. Alternatively,

- 6 -

fibre wetted with a hypochlorite bleaching liquor may be treated with aqueous acid or an acidic or particularly a neutral buffer solution to cause degradation to occur.

Alternatively, previously dried lyocell fibre may be
5 subjected to degradation step (4) according the invention using conventional bleaching equipment for cotton, for example a kier. Further alternatively, never-dried or previously dried lyocell fibre may be subjected in tow or staple form to degradation step (4) according to the
10 invention utilising conventional equipment for the continuous wet treatment of wet-spun fibres. For example, the lyocell fibre may be laid onto a continuous woven mesh belt and then passed under a series of sprays or other liquor distribution devices alternating with mangle rollers,
15 using the type of equipment generally known for washing newly-spun viscose rayon. Longer treatment times are more readily obtained using such alternative types of equipment than when a wetted tow is passed through a steam tunnel.

Alternatively, other bleaching treatments known in the
20 art for cellulose may be used, for example chlorite bleaching. Aggressive conditions should generally be chosen to ensure a significant reduction in D.P.

In another embodiment of the invention, cellulose D.P. is reduced by treating the lyocell fibre with aqueous acid.
25 The acid is preferably a mineral acid, more preferably hydrochloric acid, sulphuric acid or in particular nitric acid. For example, the fibre may be wetted with a solution containing from about 0.2 to about 4.5 per cent by weight concentrated nitric acid in water. After wetting with acid,
30 the fibre is preferably heated to cause the desired reduction in D.P., for example by passage through a steam tunnel as described hereinabove with respect to aqueous bleaching processes.

After treatment with a bleaching or acid liquor to

- 7 -

reduce cellulose D.P., the lyocell fibre is generally washed to remove traces of the chemicals used to induce degradation and any byproducts and is generally then dried in known manner.

- 5 Other methods known in the art which reduce the D.P. of cellulose may also be employed, for example exposure to cellulolytic enzymes, electron beam radiation, ozone, ultrasonic vibrations or treatment with peroxy compounds such as peracetic acid, or persulphate and perborate salts.
- 10 Combinations of two or more methods may be used. Ultrasonic treatment may additionally serve to induce fibrillation in the fibre.

The D.P.-reducing step (4) generally degrades the tensile properties of the lyocell fibres. This would
15 normally be thought to be most undesirable. It has nevertheless been found that fibre produced according to the process of the invention has generally satisfactory tensile properties for use in the end-uses in which highly fibrillating fibre is desired, for example the manufacture
20 of paper and non-woven articles.

The D.P. of cellulose used in the manufacture of known lyocell fibre is commonly in the range 400 to 1000, often 400 to 700. The D.P. of cellulose in lyocell fibre produced by the process of the invention may be below about 250, more
25 preferably below about 200, below about 150 or about 100. The D.P. of cellulose in lyocell fibre produced by the process of the invention is preferably at least minus 75, because at lower values than this the fibre tends to disintegrate. (It will be appreciated that, although a
30 negative D.P. is a physical impossibility, the quoted values of D.P. are obtained by applying the standard conversion to solution viscosity measurements in the manner hereinbefore described and not by direct measurement.) The D.P. of cellulose in lyocell fibre produced by the process of the
35 invention is preferably in the range 0 to 350, further

- 8 -

preferably 150 to 250, particularly if the D.P. of the lyocell fibre before treatment in the degradation step (4) is in the range 500 to 600. The D.P. of the cellulose may be reduced by at least about 300 units in the degradation 5 step. The D.P. of the cellulose may be reduced by about 200 to about 500 units, often about 300 to about 400 units in the degradation step. It has surprisingly been found that the fibrillation tendency of lyocell fibre produced by the process of the invention is markedly higher than that of 10 lyocell fibre of the same D.P. manufactured using low D.P. cellulose as starting material and omitting the D.P.-reducing step of the invention, for example if the fibre D.P. is about 400.

The titre of the fibre subjected to the degradation step 15 (4) according to the invention may generally be in the range 0.5 to 30 dtex. It has been found that the process of the invention is most effective in increasing the fibrillation tendency of fibres of relatively low titre, for example 1 to 5 dtex or 1 to 3 dtex, perhaps on account of 20 their greater surface to volume ratio.

It has been observed that the fibrillation tendency of lyocell fibre is directly related to the cellulose concentration of the solution from which it is made. It will be understood that raising the cellulose concentration 25 generally necessitates a reduction in cellulose D.P. to maintain the viscosity of the solution below the practical maximum working viscosity. The increase in fibrillation tendency achievable by use of the process of the invention is generally greater than the increase achievable by raising 30 the cellulose concentration of the solution.

Lyocell fibre produced by the process of the invention is useful for example in the manufacture of paper and nonwoven articles, either alone or in blends with other types of fibre, including standard lyocell fibre. A 35 papermaking slurry containing lyocell fibre produced by the

- 9 -

process of the invention requires markedly less mechanical work, for example beating, refining, disintegration or hydropulping, to reach a chosen degree of freeness than slurry containing standard lyocell fibre. This is a particular advantage of the invention. The process of the invention may reduce the working time required by a high shear device on the resulting fibre to 50 per cent or less, preferably 20 per cent or less, further preferably 10 per cent or less, of that required to achieve a given freeness using standard fibre. Methods which reduce working time to a value in the range from about 20 to about 50 percent, or from about 20 to about 33 percent, of that required for standard fibre may be preferred. Lyocell fibre produced according to the invention may fibrillate in low-shear devices such as hydropulpers, which induce little or no fibrillation in conventional fibres under usual operating conditions. Lyocell fibre produced according to the process of the invention may have enhanced absorbency and wicking properties compared with conventional lyocell fibre, making it useful in the manufacture of absorbent articles.

The susceptibility of a fibre to fibrillation on mechanical working may conveniently be assessed by subjecting a dilute slurry of the fibre to mechanical working under standard conditions and measuring the drainage properties (freeness) of the slurry after various extents of working. The freeness of the slurry falls as the degree of fibrillation increases. Prior art lyocell fibre is typically capable of being beaten to Canadian Standard Freeness 400, using the Disintegration Test defined hereinafter as Test Method 3, by a number of disintegrator revolutions in the range from about 200,000 to about 250,000 and to Canadian Standard Freeness 200 by a number of disintegrator revolutions in the range from about 250,000 to about 350,000, although on occasion a greater number of revolutions may be required. The invention further provides lyocell fibre capable of being beaten to Canadian Standard Freeness 400 in the Disintegration Test by not more than

- 10 -

about 150,000 disintegrator revolutions, in particular by a number of disintegrator revolutions within the range from about 30,000 to about 150,000, often within the range from about 50,000 to about 100,000. The invention yet further
5 provides lyocell fibre capable of being beaten to Canadian Standard Freeness 200 in the Disintegration Test by not more than about 200,000 disintegrator revolutions, in particular by a number of disintegrator revolutions within the range from about 50,000 to about 150,000 or 200,000, often within
10 the range from about 75,000 to about 125,000.

Paper made from lyocell fibre according to the invention may be found to have a variety of advantageous properties. It has generally been found that the opacity of paper containing lyocell fibre increases as the degree of beating
15 is increased. This is opposite to the general experience with paper made from woodpulp. The paper may have high air-permeability compared with paper made from 100% woodpulp; this is believed to be a consequence of the generally round cross-section of the lyocell fibres and fibrils. The paper
20 may have good particle-retention when used as a filter. Blends of lyocell fibre of the invention and woodpulp provide papers with increased opacity, tear strength and air permeability compared with 100% woodpulp papers. Relatively long, for example 6 mm long, lyocell fibre may be used in
25 papermaking compared with conventional woodpulp fibres, yielding paper with good tear strength.

Examples of applications for paper containing lyocell fibre provided according to the invention include, but are not limited to, capacitor papers, battery separators,
30 stencil papers, papers for filtration including gas, air and smoke filtration and the filtration of liquids such as milk, coffee and other beverages, fuel, oil and blood plasma, security papers, photographic papers, flushable papers and food casing papers, special printing papers and teabags.

35 It is an advantage of the invention that hydroentangled

- 11 -

fabrics can be made from lyocell fibre provided according to the invention at lower entanglement pressures than are required for untreated lyocell fibre for similar fabric properties, at least for short staple lengths (up to about 5 5 or 10mm). This reduces the cost of hydroentanglement. Alternatively, a greater degree of hydroentanglement can be obtained at a given pressure than with prior art lyocell fibres. A hydroentangled fabric made from lyocell fibre provided according to the invention may have better tensile
10 properties than a fabric made from untreated lyocell fibre, although it will be understood that hydroentangling conditions will need to be optimised by trial and error for the best results in any particular case. A hydroentangled fabric containing lyocell fibre provided according to the
15 invention may exhibit high opacity, high particle retention in filtration applications, increased barrier and wetting properties, high opacity, and good properties as a wipe.

Examples of applications for hydroentangled fabrics containing lyocell fibre provided according to the invention
20 include, but are not limited to, artificial leather and suede, disposable wipes (including wet, lint-free, clean-room and spectacle wipes) gauzes including medical gauzes, apparel fabrics, filter fabrics, diskette liners, coverstock, fluid distribution layers or absorbent covers in
25 absorbent pads, for example diapers, incontinence pads and dressings, surgical and medical barrier fabrics, battery separators, substrates for coated fabrics and interlinings.

Lyocell fibre provided according to the invention may fibrillate to some extent during dry processes for nonwoven
30 fabric manufacture, for example needlepunching. Such nonwoven fabrics may exhibit improved filtration efficiency in comparison with fabrics containing conventional lyocell fibre.

The fibre provided by the invention is useful in the
35 manufacture of textile articles such as woven or knitted

- 12 -

articles, alone or in combination with other types of fibre including prior art lyocell fibre. The presence of the lyocell fibre provided by the invention may be used to provide desirable aesthetic effects such as a peach-skin effect. Fibrillation can be induced in such fabrics by known processes such as brushing and sueding in addition to any fibrillation generated in the wet processing steps normally encountered in fabric manufacture.

10 Fibre provided according to the invention is useful in the manufacture of teabags, coffee filters and suchlike articles. The fibre may be blended with other fibres in the manufacture of paper and hydroentangled fabrics. The fibre may be blended as a binder with microglass fibre to improve
15 the strength of glass fibre paper made therefrom. The fibre may be felted in blend with wool. The fibre may be used in the manufacture of filter boards for the filtration of liquids such as fruit and vegetable juices, wine and beer. The fibre may be used in the manufacture of filter boards
20 for the filtration of viscous liquids, for example viscose. The fibre may be made into tampons and other absorbent articles with improved absorbency. Lyocell fibre may fibrillate advantageously during dry processing as well as during wet processing, for example during processes such as
25 milling, grinding, sueding, brushing and sanding. Fibrils may be removed from fibrillated lyocell fibre by enzyme finishing techniques, for example treatment with cellulases.

The following procedures identified as Test Methods 1 to 4 were used to assess fibre performance:-

30 Test Method 1 - Measurement of Cuprammonium Solution Viscosity and D.P. (the D.P. Test)

This test is based on TAPPI Standard T206 os-63. Cellulose is dissolved in cuprammonium hydroxide solution containing 15 ± 0.1 g/l copper and 200 ± 5 g/l ammonia, with
35 nitrous acid content < 0.5 g/l, (Shirley Institute standard)

- 13 -

to give a solution of accurately-known cellulose concentration (about 1% by weight). Solution flow time through a Shirley viscometer at 20°C is measured, from which viscosity may be calculated in standard manner. Viscosity-5 average D.P. is determined using the empirical equation:

$$\text{D.P.} = 412.4285 \ln [100(t-k/t) / n.C] - 348$$

where t is flow time in seconds, k the gravity constant, C the tube constant, and n the density of water in g/ml at the temperature of the test (0.9982 at 20°C).

10 Test Method 2 - Measurement of Fibrillation Tendency (Sonication)

Ten lyocell fibres (20 ± 1 mm long) are placed in distilled water (10 ml) contained within a glass phial (50 mm long x 25 mm diameter). An ultrasonic probe is inserted
15 into the phial, taking care that the tip of the probe is well-centered and is positioned 5 ± 0.5 mm from the bottom of the phial. This distance is critical for reproducibility. The phial is surrounded with an ice bath, and the ultrasonic probe is switched on. After a set time,
20 the probe is switched off, and the fibres are transferred to two drops of water placed on a microscope slide. A photomicrograph is taken under x20 magnification of a representative area of the sample. Fibrillation Index (C_f) is assessed by comparison with a set of photographic
25 standards graded from 0 (no fibrillation) to 30 (high fibrillation).

Alternatively, C_f may be measured from the photomicrograph using the following formula:

$$C_f = n.x/L$$

30 where n is the number of fibrils counted, x is the average length of the fibrils in mm, and L is the length in mm of

- 14 -

fibre along which fibrils are counted.

The ultrasonic power level and sonication time (5-15 minutes, standard 8 minutes) required may vary. The calibration of the equipment should be checked using a sample of fibre of known fibrillation tendency (C_f 4-5 by Test Method 2) before use and between every group of five samples.

Test Method 3 - Measurement of Fibrillation Tendency (The Disintegration Test)

10 Lyocell fibre (6 g, staple length 5mm) and demineralised water (2 l) are placed in the bowl of the standard disintegrator described in TAPPI Standard T-205 om-88, and disintegrated (simulating valley beating) until the fibre is well-dispersed. Suitable disintegrators are available from
15 Messmer Instruments Limited, Gravesend, Kent, UK and from Büchel van de Korput BV, Veemendaal, Netherlands. The Canadian Standard Freeness (CSF) of the fibre in the resulting slurry or stock is measured according to TAPPI Standard T227 om-94 and recorded in ml. In general, the
20 stock is divided into two 1 l portions for measurement of CSF and the two results are averaged. Curves of CSF against disintegrator revolutions or disintegration time may then be prepared and the relative degree of disintegration required to reach a given CSF assessed by interpolation. The zero
25 point is defined as that recorded after 2500 disintegrator revolutions, which serve to ensure dispersion of the fibre in the stock before CSF measurement.

Test Method 2 is quick to perform, but it may give variable results because of the small fibre sample. Test
30 Method 3 gives very reproducible results. These factors should be taken into account during assessment of fibrillation tendency.

- 15 -

Test Method 4 - Measurement of Fibrillation Tendency
(Valley Beating)

Lyocell fibre is tested by beating in accordance with TAPPI data sheet T 200 om-85 except that a stock consistency of 0.9% is used. The beater used is preferably one dedicated to the testing of lyocell fibres. Results are best treated as comparative within each series of experiments.

Brief Description of the Drawings

10 Figures 1 and 2 are graphs of the Canadian Standard Freeness, expressed in ml, (y-axis) against the beating time, expressed in min, (x-axis) for the samples in Examples 1 and 2, respectively.

15 Figures 3, 4 and 5 are graphs of the Canadian Standard Freeness, expressed in ml, (y-axis) against the number of disintegrator revolution, expressed in thousands of revolutions, (x-axis) for the samples in Examples 3, 4 and 5, respectively.

20 Figures 6 and 7 are graphs of the Canadian Standard Freeness, expressed in ml, (y-axis) against the beating time, expressed in min, (x-axis) for the samples in Examples 7 and 8, respectively.

25 Figure 8 is a graph of beating time required to achieve Canadian Standard Freeness 200, expressed in min, (y-axis) against Fibre D.P. (x-axis) for the samples in Example 9.

The invention is illustrated by the following Examples, in which lyocell fibre was prepared in known manner by spinning a solution of woodpulp cellulose in aqueous N-methylmorpholine N-oxide:-

- 16 -

Example 1

Never-dried lyocell fibre tow (1.7 dtex ecru, 300 g samples) was saturated with an aqueous solution containing either hydrogen peroxide (1% by volume) or sodium hypochlorite (1% by weight available chlorine), and in both cases sodium hydroxide (0.5% by weight), and placed in a steamer. The steaming cycle was heating over 7 min., 110°C for 1 min., and cooling under vacuum over 4 min. The steamed fibre was washed and dried, and exhibited the properties shown in Table 1:

Table 1

Ref.	D.P.	C _f	dtex	ADT CN/tex	ADE %	WT CN/tex	WE %	
15	Untreated							
1A	563	0-2	1.76	40.6	13.5	36.7	16.0	
	Peroxide							
1B	299	5-15	1.76	34.8	11.1	23.7	11.6	
	Hypochlorite							
20	1C	92	20-30	1.78	23.8	6.8	18.0	8.8

(D.P. was measured by Test Method 1. Fibrillation tendency (C_f) was measured by Test Method 2. ADT = air-dry tenacity, ADE = air-dry extensibility, WT = wet tenacity, WE = wet extensibility.)

25 The fibre was hand-cut to 5 mm staple, formed into a web (nominally 60 g/m²), and subjected to hydroentanglement using various jet pressures (measured in bar). The hydroentangled nonwoven lyocell fabric so obtained exhibited the properties shown in Table 2:

- 17 -

Table 2

Ref	Jet bar	Breaking load (daN)				Overall tenacity	
		M.D.	M.D.	C.D.	C.D.	(daN/g)	
		dry	wet	dry	wet	dry	wet
5 Untreated 1A	100	3.56	2.54	4.63	2.75	4.13	2.65
	160	3.84	3.25	3.74	4.01	3.79	3.65
	200	3.48	3.16	-	-	-	-
Peroxide 1B	75	2.77	1.07	2.63	1.51	3.60	1.75
	100	5.00	3.32	3.51	3.55	5.76	4.56
10 Hypochlorite 1C	75	4.77	1.12	3.34	-	5.49	-
	100	5.06	1.96	4.44	1.92	4.76	1.94
	160	4.24	1.46	2.40	1.08	3.45	1.28

(M.D. = machine direction, C.D. = cross direction)

The treated fibre could be converted into stronger
 15 hydroentangled nonwoven fabric than the untreated control
 under suitable conditions. Notably, several fabrics made
 from treated fibre exhibited higher overall dry tenacity
 than any of the controls. This is remarkable in that the
 treated fibre had inferior tensile properties to the
 20 untreated fibre.

The lyocell staple fibre was slurried at stock consistency
 0.9% and subjected to valley beating using Test Method 4.
 The relationship between the CSF of the stock and the
 beating time is shown in Figure 1 and Table 3. It can be
 25 seen that much shorter beating times were required to reach
 the same degree of freeness with treated than with untreated
 fibre.

Table 3

Sample	Ref.	Beating time min. to reach	
		200 CSF	400 CSF
Untreated	1A	226	155
Peroxide	1B	110	85
Hypochlorite	1C	46	29

- 18 -

Example 2

Never-dried lyocell tow (1.7 dtex ecru) was treated as follows:

- 2A. Untreated control.
- 5 2B. On-line bleaching, sodium hypochlorite solution (1% by weight available chlorine) at 50°C, bath residence time 4 sec, followed by steaming in a tunnel (100°C steam) for 25 sec.
- 10 2C. As 2B, but bath residence time 7 sec. and steaming time 50 sec.
- 2D. As 2B, but off-line, bath residence time 60 sec. and steaming as described in Example 1.
- 2E. As 2D, but 2% by weight available chlorine.
- 15 2F. As 2D, but using hydrogen peroxide solution (1% by weight).

The treated fibre was washed and dried and cut into 5 mm staple.

The lyocell staple fibre was slurried at stock consistency 0.9% and subjected to valley beating using Test Method 4.

20 The relationship between the CSF of the stock and the beating time is shown in Figure 2 and Table 4. It can be seen that much shorter beating times were required to reach the same degree of freeness with treated than with untreated fibre.

25

Table 4

Sample	Beating time min to reach	
	200 CSF	400 CSF
2A	248	197
2B	98	75
30 2C	-	61
2D	-	50
2E	27	14
2F	109	83

- 19 -

Beaten slurries of samples 2A-2E were made into paper. The physical properties of all the samples (tear strength, burst index, tensile strength and bulk) were very similar.

The cut staple was formed into webs and hydroentangled as described in Example 1 (jet pressure 100 bar). The samples of fabric so obtained had the properties shown in Table 5:

Table 5

	Fibre D.P.	Fibre tenacity CN/tex	Overall fabric tenacity N/g	
			Dry	Wet
10 2A	524	43.2	18.6	27.9
2B	227	40.9	41.7	62.4
2C	206	36.1	35.2	69.9
2D	159	34.7	45.5	79.6
2E	40	23.3	18.5	49.3

15

Example 3

Example 2 was repeated, except that the following treatment conditions were used:

- 3A As 2A.
- 3B On-line, nitric acid solution (0.72% by weight concentrated nitric acid) at 50°C, bath residence time 4 sec, followed by steaming (25 sec).
- 3C As 3B, but 2.8% nitric acid.
- 3D As 3B, but 4.25% nitric acid.

The treated fibre was washed and dried and cut into 5 mm staple. The lyocell staple fibre was subjected to disintegration using Test Method 3. The relationship between the CSF of the stock and the beating time is shown in Figure 3 and Table 6. It can be seen that shorter beating times were required to reach the same degree of freeness with treated than with untreated fibre.

- 20 -

Table 6

Sample	Disintegration rev. x1000 to reach	
	200 CSF	400 CSF
3A	262	205
5 3B	221	179
3C	170	138
3D	149	119

Example 4

Example 2 was repeated, except that the following
10 treatment conditions were used:

- 4A Untreated control.
- 4B Off-line, sodium hypochlorite solution (0.5% by weight available chlorine) at 50°C, bath residence time 60 seconds, no steaming.
- 15 4C As 4B, except that the treatment bath additionally contained 15 g/l sodium bicarbonate (pH 8.5). No steaming was used.
- 4D As 4B, except that the treatment bath additionally contained 15 g/l sodium dihydrogen phosphate (pH 6.8). No steaming was used.
- 20 4E As 4B, except that the treatment bath additionally contained 7.5 g/l citric acid and 7.5 g/l sodium dihydrogen citrate (pH 5.5). No steaming was used.
- 4F As 2D.

25 The treated fibre was washed and dried and cut into 5 mm staple. The lyocell staple fibre was assessed using Test Method 3. The relationship between the CSF of the stock and the beating time is shown in Figure 4 and Table 7. It can be seen that the addition of bicarbonate or phosphate buffer
30 reduced the beating time required to reach any particular degree of freeness.

- 21 -

Table 7

Sample	Disintegration rev. x1000 to reach	
	200 CSF	400 CSF
4A	315	261
5 4B	254	221
4C	176	133
4D	86	65
4E	280	230
4F	43	32

10

Example 5

Example 2 was repeated, except that the following treatment conditions were used:

- 5A Untreated control.
- 15 5B Hydrogen peroxide solution (1.0% by weight) at 50°C, on-line at line speed 6 m/min (bath residence 7 sec), followed by steaming for 50 seconds.
- 5C As 5B, except that the treatment bath additionally contained 0.5% by weight sodium hydroxide.
- 20 5D As 5C, except that the treatment bath contained sodium hypochlorite (1% by weight available chlorine) instead of hydrogen peroxide.

The treated fibre was washed and dried and cut into 5 mm staple. The lyocell staple fibre was assessed using Test Method 3. The relationship between the CSF of the stock and 25 disintegrator revolutions is shown in Figure 5 and Table 8. It can be seen that addition of sodium hydroxide reduced the beating time required to reach any particular degree of freeness when hydrogen peroxide was employed as bleaching agent.

- 22 -

Table 8

Sample	Disintegration rev. x 1000 to reach	
	200 CSF	400 CSF
5A	246	211
5 5B	246	214
5C	189	135
5D	121	80

Example 6

Lyocell fibre was bleached using the treatment
 10 bath liquors described in Example 4 under reference codes
 4B, 4C, 4D and 4E at 25 and 50°C. The results shown in
 Table 9 were obtained:

Table 9

	Liquor	Temp °C	pH	D.P.	dtex	Tenacity cN/tex	Extension %
15	None	-	-	548	2.0	37.7	15
	4B	25	11.46	524	1.9	37.7	15
	4B	50	10.71	406	1.9	37.1	14
	4C	25	8.65	489	1.8	35.9	14
20	4C	50	8.64	376	1.8	33.4	13
	4D	25	6.73	298	2.0	28.7	10
	4D	50	6.69	308	1.9	24.7	7
	4E	25	5.67	526	1.9	37.8	14

The samples treated at 50°C were those of Example 4.

25

Example 7

An unpigmented solution of cellulose in aqueous
 N-methylmorpholine N-oxide was extruded through a plurality
 of spinnerettes (spinning speed 37 m/min) and washed with
 water. The titre of the individual filaments was 1.7 dtex
 30 and the titre of the combined tow was 64 ktex. The tow was
 then passed firstly through a bath containing aqueous sodium
 hypochlorite solution (temperature 76-80°C, steam sparges,

- 23 -

residence time 60 sec) and secondly through a circulating bath to which sulphuric acid was continuously added (temperature 67°C, pH 8, residence time approx 5 sec). The tow was then washed with cold water and dried. The 5 fibrillation tendency of the fibre was assessed by Test Method 4. Hypochlorite concentration in the treatment bath and experimental results are shown in Figure 6 and Table 10.

Table 10

Ref.	Available chlorine % by weight	Beating time min. to reach	
		400 CSF	200 CSF
10 7A	Control	187	240
7B	0.2	153	204
7C	0.3	120	170
7D	0.47	109	-

15

Example 8

Example 7 was repeated, except that matt fibre (pigmented with titanium dioxide) was used. Hypochlorite concentration in the treatment bath and experimental results are shown in Figure 7 and Table 11.

20

Table 11

Ref.	Available chlorine % by weight	Beating time min. to reach	
		400 CSF	200 CSF
8A	Control	143	197
8B	0.2	122	174
25 8C	0.45	114	167
8D	0.65	87	126

Example 9

Lyocell fibre was degraded according to the invention under various conditions, and its D.P. and beating 30 performance assessed using Test Methods 1 and 4

- 24 -

respectively. The relationship between the beating time to 200 CSF and the fibre D.P. is shown in Figure 8. (The data plotted with a cross are factory trials and the data plotted with a filled square are laboratory trials.) The three 5 samples with D.P. above 500 are untreated controls.

Example 10

Lyocell fibre was spun from a solution in aqueous N-methylmorpholine N-oxide of "Viscokraft" (Trade Mark of International Paper Co., USA) pulp of nominal D.P. 600 with 10 nominal cellulose concentration 15%, washed, saturated with solutions of various reagents (bath temperature 50°C, residence time 60 seconds), steamed in the manner of Example 1 for 60 seconds, and dried. The D.P. and Fibrillation Index C_f of the fibre were assessed by Test Methods 1 and 2. The 15 results shown in Table 12 were obtained:

Table 12

	Reagents	Steam temp°C	D.P.	C_f
	Untreated control	-	565	1.3
	<u>Series 1</u>			
20	0.5% NaOH	110	567	0.7
	0.05% NaOCl	110	548	2.1
	0.25% NaOCl	110	427	1.8
	0.5% NaOCl	110	306	3.7
	1.0% NaOCl	110	178	11.0
25	2.0% NaOCl	110	44	30.0
	<u>Series 2</u>			
	1.0% NaOCl + 0.5% NaOH	-	508	1.1
	<u>Series 3</u>			
	1.0% NaOCl + 0.5% NaOH	100-120	169-176	8.7-11.0
30	1.0% NaOCl + 0.05% NaOH	110	109	20.3
	1.0% NaOCl + 0.25% NaOH	110	139	18.4
	1.0% NaOCl + 0.5% NaOH	110	155	20.0
	1.0% NaOCl + 1.0% NaOH	110	168	15.1
	1.0% NaOCl + 2.0% NaOH	110	194	7.3

- 25 -

NaOCl concentration is expressed in terms of per cent by weight of available chlorine. NaOH concentration is expressed in terms of per cent by weight. It will be observed that the bleached samples of low D.P. had markedly 5 higher fibrillation indices than any of the unbleached samples. It will also be recognised that solutions of cellulose whose D.P. is below about 200 cannot readily be spun into fibre by solvent-spinning processes.

Example 11

10 Never-dried lyocell tow was passed through a bleach bath containing 0.5% by weight NaOH and a bleaching agent, steamed (steam temperature 100°C), washed and dried. The D.P. and Fibrillation Index C_f of the dried fibre were assessed. Experimental conditions and results are shown in 15 Table 13, C_f being quoted as the observed range between different photographs.

Table 13

Bleach Bath			Steaming Time	D.P.	C _f
Agent	Temp°C	Time sec	sec		
Control	-	-	-	532	1-2
1.0% H ₂ O ₂	60	50	25	426	3-5
1.11% NaOCl	40	50	50	205	4-12
1.11% NaOCl	40	25	25	249	2-8
1.10% NaOCl	60	50	50	203	4-16
1.10% NaOCl	60	25	25	227	7-14
0.98% NaOCl	70	50	50	221	4-10
0.98% NaOCl	70	25	25	251	2-10
1.00% NaOCl	60	50	25	235	6-8

(% NaOCl is % by weight available chlorine, % H₂O₂ is % by weight)

An appreciable increase in fibrillation tendency was observed in all cases.

- 26 -

Example 12

Previously-dried 1.7 dtex 5 mm bright lyocell fibre (200 kg) was bleached in aqueous sodium hypochlorite (3 g/l available chlorine) at 40°C for 75 minutes, soaked in aqueous sodium metabisulphite (1 g/l) as antichlor for 30 minutes, washed with dilute acetic acid to return fibre pH to neutral, and dried. The nominal D.P. of the cellulose from which the fibre was made was 600 and the average D.P. of the treated fibre was 217 (range 177-230, six samples). Disintegration Test results for the treated sample and for an untreated control sample are shown in Table 14.

Table 14

Disintegrator revolutions	0	100,000	150,000
Control sample CSF	650	620	510
Treated sample CSF	656	400	80

Example 13

A 8 ktex tow of never-dried 1.7 dtex bright lyocell fibre was passed through a first aqueous bath containing copper (II) sulphate (0.1% w/w) and a second aqueous bath containing hydrogen peroxide (4% w/w) and sodium hydroxide (0.5% w/w). The temperature of each bath was 20-25°C, and the residence times in the baths were 10 and 131 seconds respectively. The tow was then passed through a steam tunnel at 100°C with residence time 120 seconds, rinsed and dried. A sample treated as above, but with the omission of the copper sulphate bath, and an untreated control sample were also prepared. Disintegration Test results are given in Table 15.

- 27 -

Table 15

Disintegrator revolutions x 1000	0	50	75	100	175	200
Untreated control sample CSF	697	-	-	672	-	611
Treated sample (no CuSO ₄)	715	-	-	491	66	-
Treated sample (with CuSO ₄)	702	335	124	-	-	-

A dash indicates that no measurement was made.

Example 14

A 5.3 ktex, tow of 1.7 dtex bright lyocell fibre was passed through an aqueous bath containing sodium hypochlorite (17-20°C, residence time 42 sec.), next through a steam tunnel (100°C, residence time 120 sec.), rinsed and dried. Fibrillation tendency was measured by Test Method 3 on fibre cut to 5 mm staple, and the number of disintegrator revolutions (in thousands, krev) required to reach 200 CSF estimated by graphical interpolation. Other experimental details and results are shown in Table 16.

Table 16

Bath	D.P:	dtex	Tenacity cN/tex	Extension %	krev to 200 CSF
None (control)	533	1.88	36.2	11	307
0.1% A.Cl	429	1.85	36.7	11	228
0.3% A.Cl	341	1.69	37.3	11	190
1.0% A.Cl	154	1.68	34.1	1	100
2.0% A.Cl	49	1.91	22.0	6	61
1.0% A.Cl + 0.5% NaOH	242	1.80	37.0	12	140

(A.Cl = available chlorine, % = per cent by weight)

Example 15

A 10.6 ktex tow of 1.7 dtex bright lyocell fibre was passed through an aqueous bath containing sodium

- 28 -

hypochlorite (16-18°C, residence time 132 sec.), next through a steam tunnel (100°C, residence time 120 sec.), rinsed and dried. Fibrillation tendency was measured as described in Example 14. Other experimental details and results are shown in Table 17.

Table 17

Bath	D.P.	krev to 200 CSF
None (control)	501	341
0.5% H ₂ O ₂ + 0.5% NaOH	180	123
1.0% H ₂ O ₂ + 0.5% NaOH	158	113
2.0% H ₂ O ₂ + 0.5% NaOH	156	117
3.0% H ₂ O ₂ + 0.5% NaOH	147	113
4.0% H ₂ O ₂ + 0.5% NaOH	120	87
(% = per cent by weight)		

Example 16

Never-dried bright lyocell tow (various fibre titres, i.e. dtex) was soaked in an aqueous solution containing sodium hypochlorite (1% by weight available chlorine) and sodium hydroxide (0.5% by weight), steamed for 1 minute as described in Example 1, washed, dried and cut to 5 mm staple length. The D.P. and fibrillation tendency (Test Method 3) of the treated fibre and of untreated control samples are reported in Table 18.

Table 18

Fibre dtex	Control			Treated		
	D.P.	CSF		D.P.	CSF	
		0 rev	100 krev		0 rev	100 krev
1.7	530	685	656	136	658	179
2.4	540	698	673	140	695	413
3.4	557	705	696	136	705	560

- 29 -

Example 17

Never-dried bright lyocell tow (1.7 dtex/filament, 15.4 ktex total) was passed at 6.4 m/min through an application bath containing 4% by weight hydrogen peroxide and 0.5% by weight sodium hydroxide (temperature 17-19°C, residence time 125-130 sec.), then through a steam tunnel (100°C, residence time 120 sec.), washed and dried. The washing step optionally included a wash with 2% by weight hydrochloric acid. The fibrillation properties of the fibre and of an untreated control (measured by the Disintegration Test) are reported in Table 19.

Table 19

	krev to 400 CSF	krev to 200 CSF
Control	185	235
Treated (12 samples)	75-100	95-120

- 30 -

CLAIMS

1. A process for the manufacture of lyocell fibre with an increased tendency to fibrillation, including the steps of:

- (1) dissolving cellulose in a solvent to form a solution,
- (2) extruding the solution through a die to form a plurality of filaments, and
- (3) washing the filaments to remove the solvent, thereby forming lyocell fibre,

characterised by the step of

- (4) subjecting the lyocell fibre to conditions effective to reduce the Degree of Polymerisation of the cellulose by at least about 200 units.

2. A process according to claim 1, characterised in that the solvent comprises a tertiary amine N-oxide.

3. A process according to claim 2, characterised in that the tertiary amine N-oxide is N-methylmorpholine N-oxide.

4. A process according to any preceding claim, characterised in that the Degree of Polymerisation of the cellulose is reduced in step (4) by at least about 300 units.

5. A process according to any preceding claim, characterised in that the Degree of Polymerisation of the cellulose after step (4) is below about 250 units.

6. A process according to any preceding claim, characterised in that the Degree of Polymerisation is reduced in step (4) by a bleaching treatment.

7. A process according to claim 6, characterised in that the bleaching treatment comprises applying to the fibre a bleaching liquor which is an aqueous solution comprising sodium hypochlorite.

- 31 -

8. A process according to claim 7, characterised in that the concentration of sodium hypochlorite in the bleaching liquor expressed as available chlorine is in the range 0.5 to 2.0 percent by weight.

9. A process according to claim 6, characterised in that the bleaching treatment comprises applying to the fibre a bleaching liquor which is an aqueous solution comprising hydrogen peroxide.

10. A process according to any preceding claim, characterised in that step (4) is performed on never-dried lyocell fibre.

11. A process according to any one of claims 1 to 9, characterised in that step (4) is performed on previously-dried lyocell fibre.

12. Paper comprising lyocell fibre, characterised in that at least some of the lyocell fibre has been manufactured by the process of any one of claims 1 to 11.

13. Hydroentangled fabric comprising lyocell fibre, characterised in that at least some of the lyocell fibre has been manufactured by the process of any one of claims 1 to 11.

14. Lyocell fibre, characterised in that it is capable of being beaten to Canadian Standard Freeness 400 in the Disintegration Test by a number of disintegrator revolutions in the range from about 30,000 to about 150,000.

15. Lyocell fibre according to claim 14, characterised in that it is capable of being beaten to Canadian Standard Freeness 400 in the Disintegration Test by a number of disintegrator revolutions in the range from about 50,000 to about 100,000.

- 32 -

16. Lyocell fibre, characterised in that it is capable of being beaten to Canadian Standard Freeness 200 in the Disintegration Test by a number of disintegrator revolutions in the range from about 50,000 to about 200,000.

17. Lyocell fibre according to claim 16, characterised in that it is capable of being beaten to Canadian Standard Freeness 200 in the Disintegration Test by a number of disintegrator revolutions in the range from about 75,000 to about 125,000.

Fig.1.


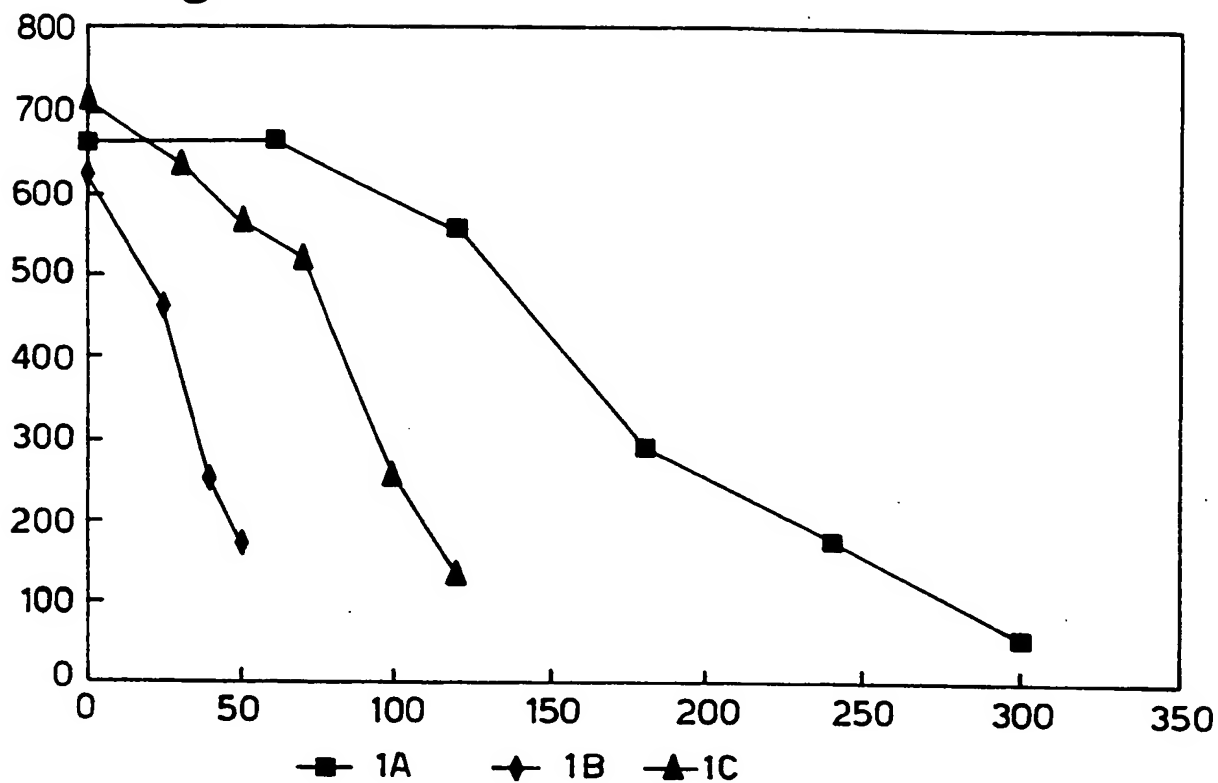


Fig.2.

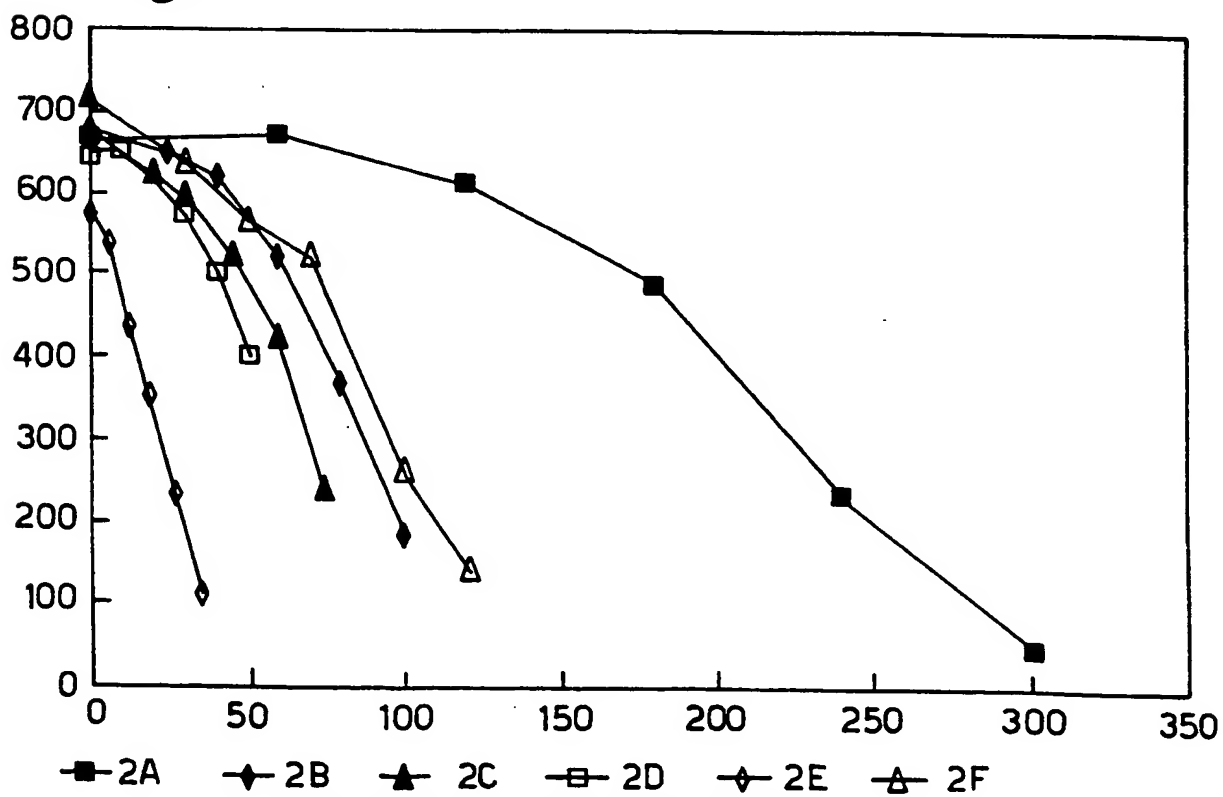

SUBSTITUTE SHEET (RULE 26)

2/4

Fig.3.


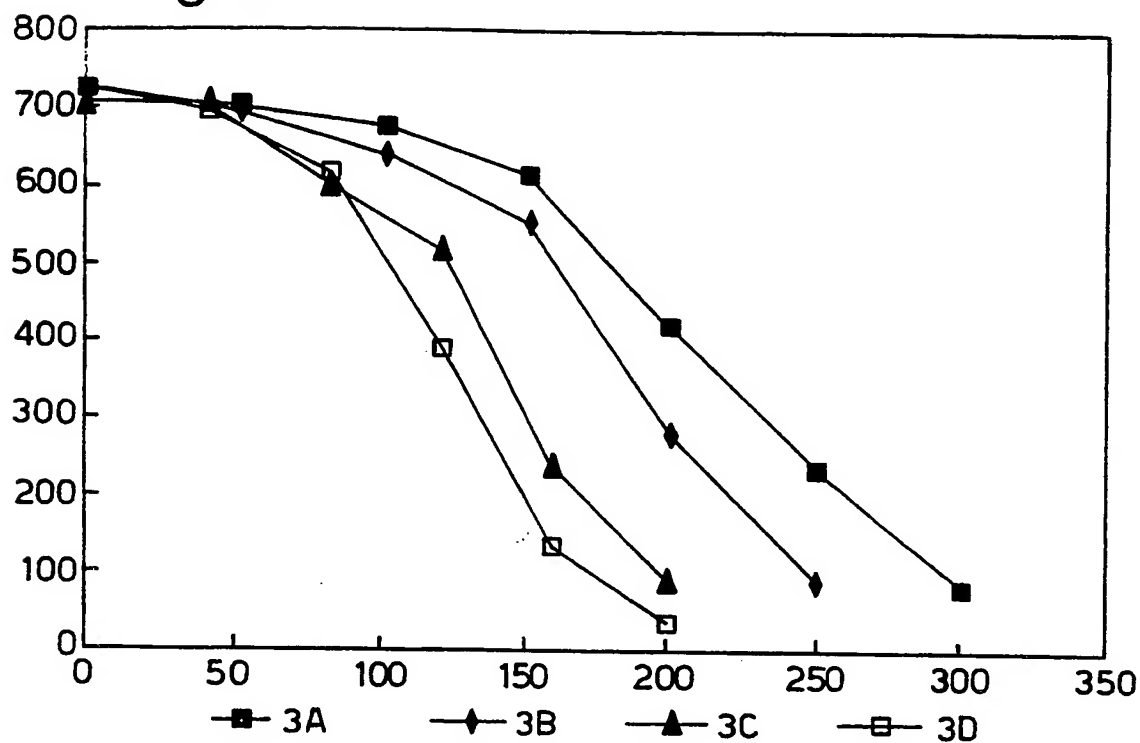


Fig.4.

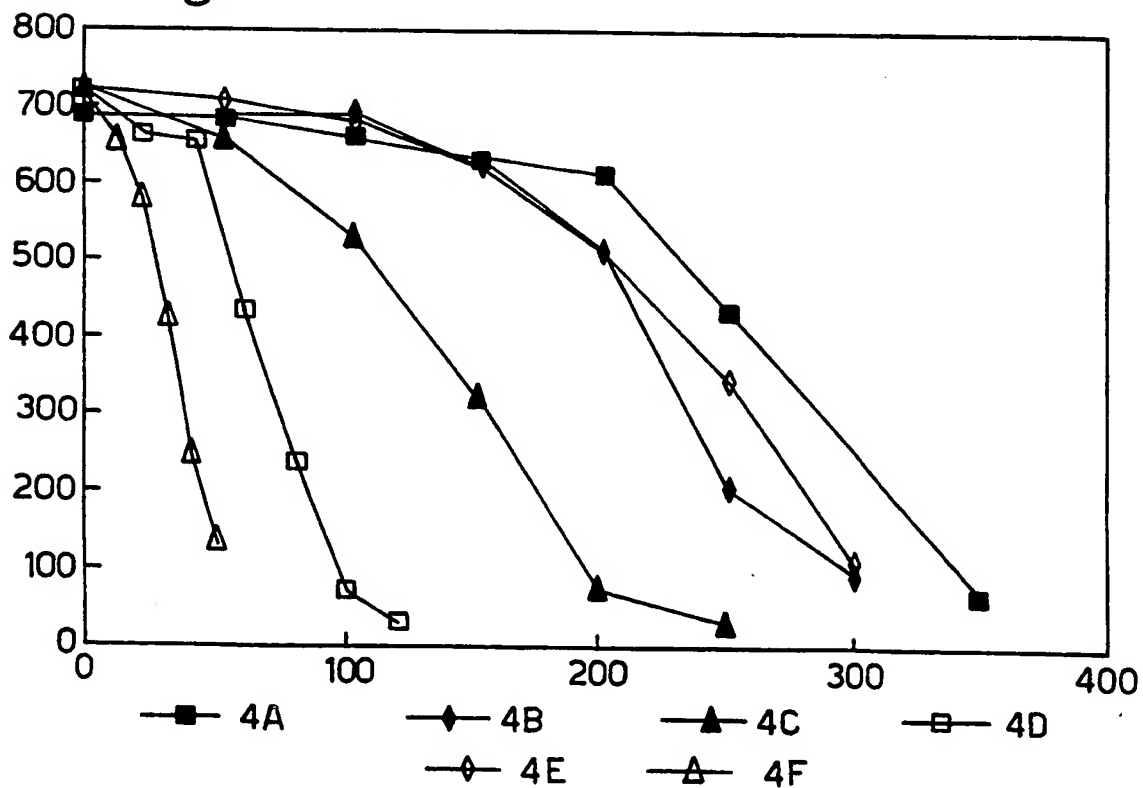

SUBSTITUTE SHEET (RULE 26)

Fig.5.


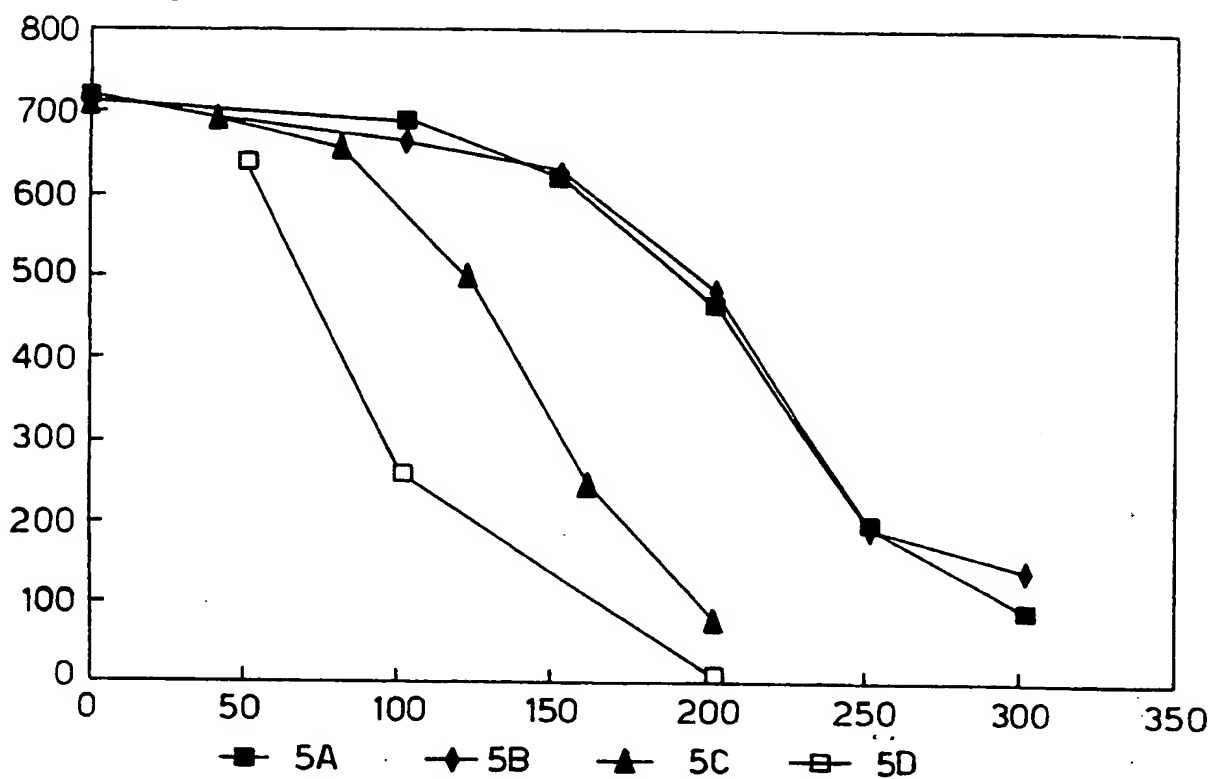


Fig.6.

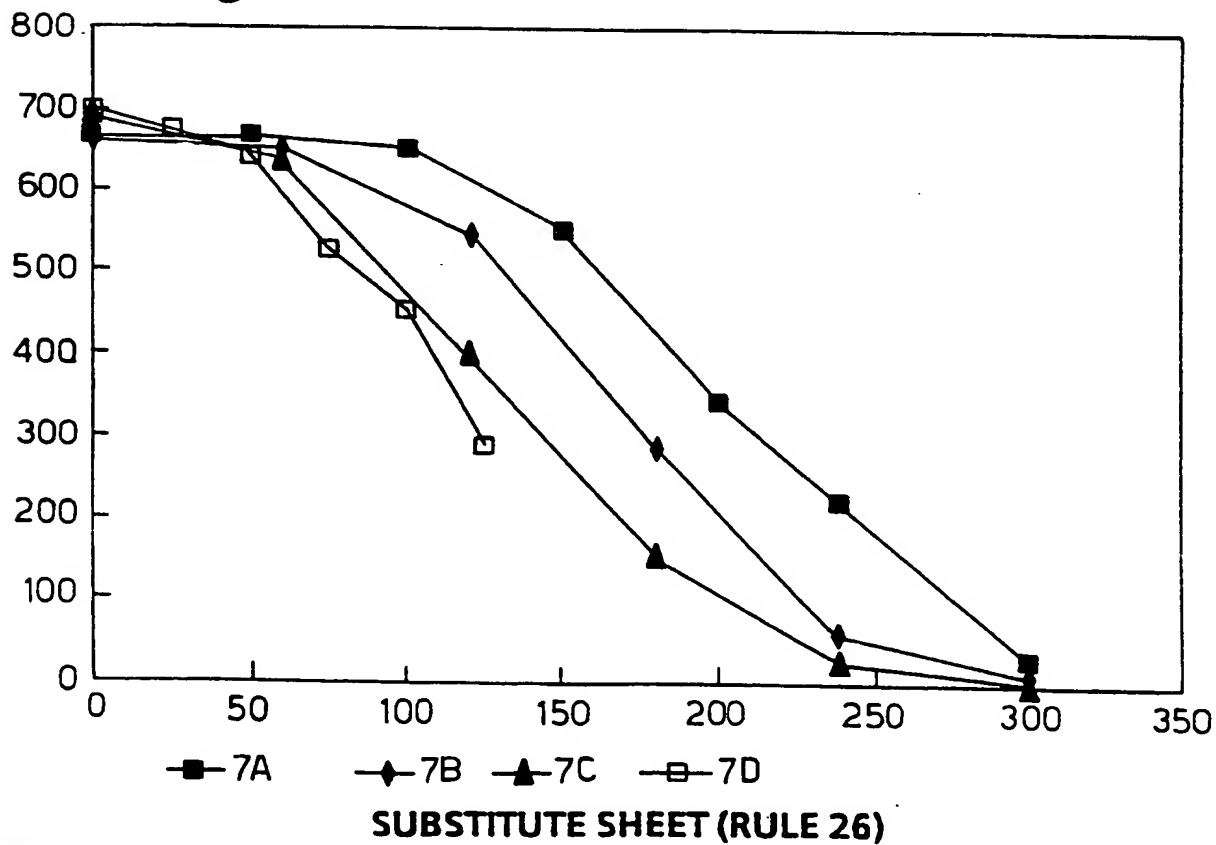

4/4

Fig.7.


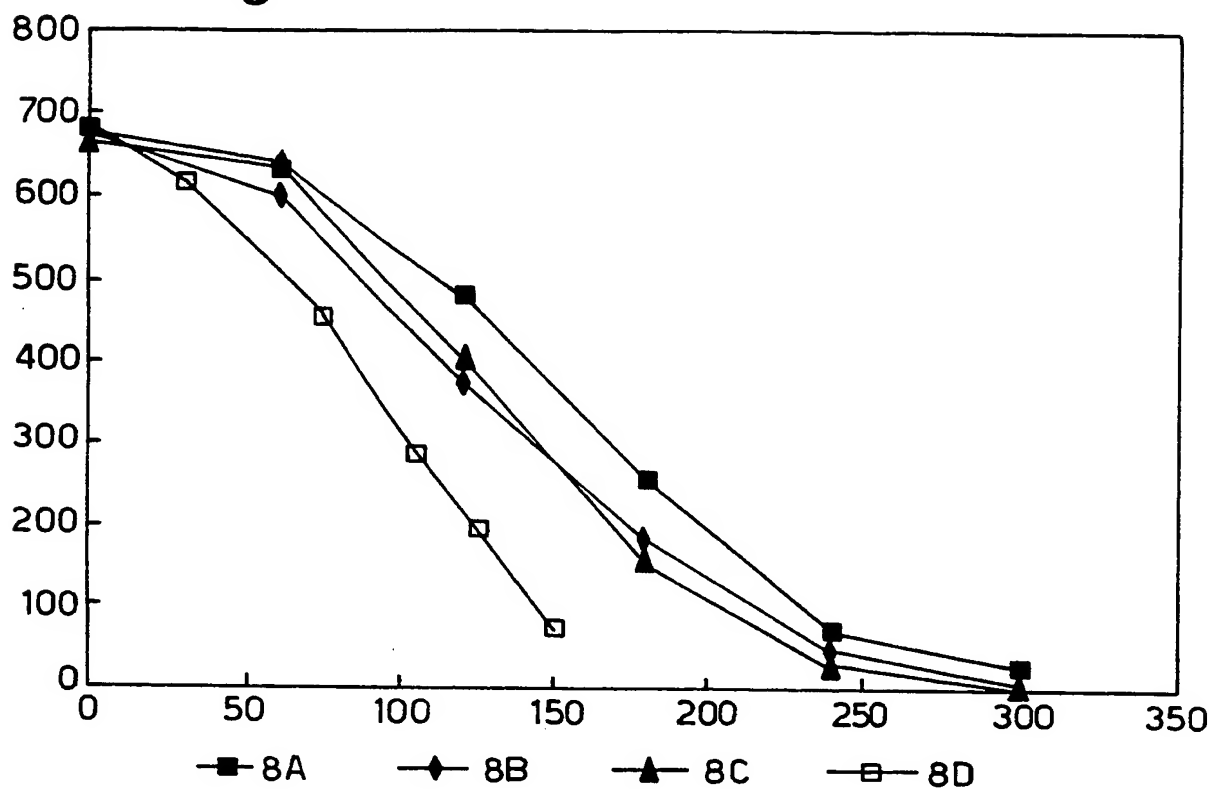


Fig.8.

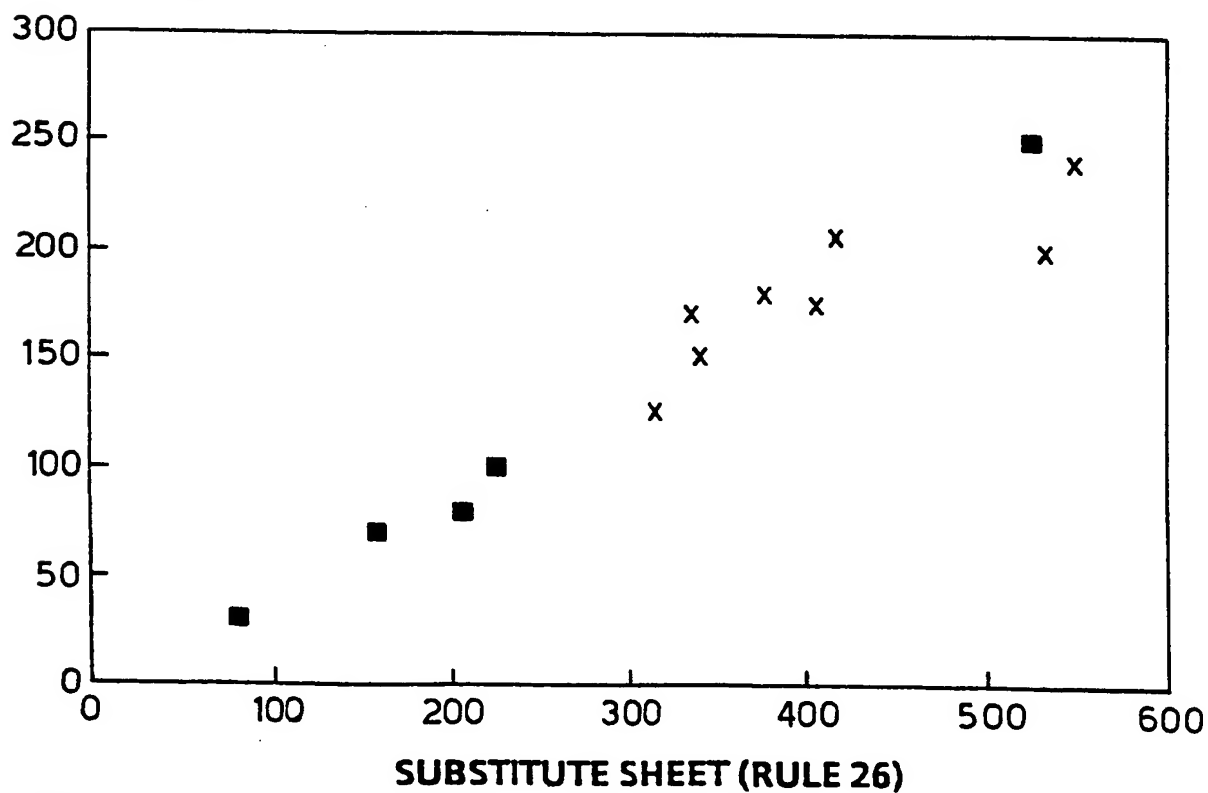

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/GB 95/01439

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D01F2/00 D21H13/08 D04H1/42

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D01F D21H D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,92 14871 (COURTAULDS PLC) 3 September 1992 see the whole document ---	1-11
P,A	LENZINGER BERICHT, no. 9, September 1994 LENZING, AUSTRIA, pages 99-101, RUDI BREIER 'DIE VEREDLUNG VON LYOCELLFASERN-EIN ERFAHRUNGSBERICHT' see the whole document ---	1-11
P,A	WO,A,95 14398 (COURTAULDS FIBRES (HOLDINGS) LTD) 1 June 1995 -----	12

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

18 October 1995

Date of mailing of the international search report

24.10.1995

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Tarrida Torrell, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 95/01439

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9214871	03-09-92	AU-B- 1241092	15-09-92
		BR-A- 9205616	02-08-94
		CZ-A- 9301582	16-02-94
		EP-A- 0571460	01-12-93
		JP-T- 6505060	09-06-94
		US-A- 5403530	04-04-95
WO-A-9514398	01-06-95	AU-B- 1074195	13-06-95